SIDEWALK DESIGN STANDARDS

OPTIONAL SIDEWALK LOCATIONS

1, 2, 3, 4

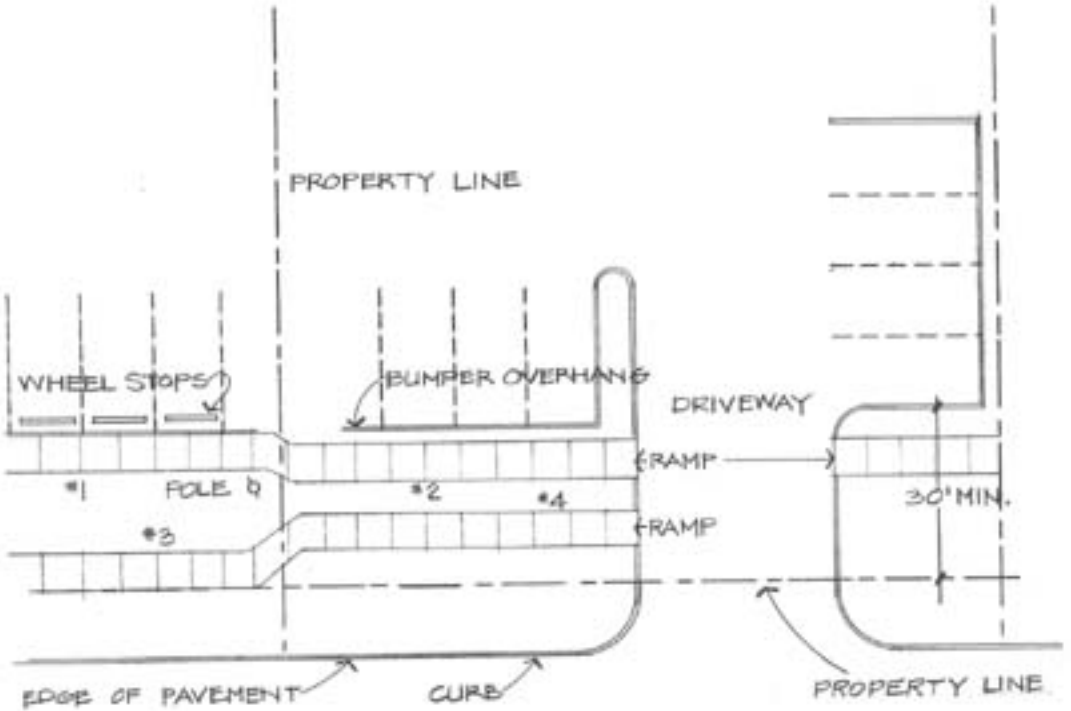

REQUIRED SIDEWALKS - 5' CONCRETE

SIDEWALK RAMPS AT DRIVEWAY AND STREET INTERSECTIONS

SIDEWALKS SHALL BE ALIGNED A THE SIDE PROPERTY LINES

SCALE: 20:1