

Proposed Plant Schedule

Trees

Qty.	Symbol	Botanical Name	Common Name	Size	Cond	Remarks
6	AR	<i>Acer rubrum</i>	Red Maple	3"-4" Cal	B&B	Full, nicely shaped
3	CC	<i>Cercis canadensis</i>	Eastern Redbud	8'-10' Ht	B&B	Full, nicely shaped, multi stemmed
6	TP	<i>Thuja plicata 'Green Giant'</i>	Green Giant Arborvitae	25'-30' Ht	B&B	Full, nicely shaped
5	QR	<i>Quercus rubra</i>	Red Oak	3"-4" Cal	B&B	Full, nicely shaped

Shrubs

Qty.	Symbol	Botanical Name	Common Name	Size	Cond	Remarks
3	Ac	<i>Amelanchier canadensis</i>	Shadblow Serviceberry	8'-10' Ht	B&B	Full, nicely shaped
9	Cs	<i>Cornus sericea</i>	Redosier Dogwood	3'-4" Ht	Cont.	Full, nicely shaped
29	Ig	<i>Ilex glabra</i>	Inkberry	3'-4" Ht	Cont.	Full, nicely shaped
46	Mp	<i>Myrica pensylvanica</i>	Bayberry	4'-5" Ht	B&B	Full, nicely shaped
100	Va	<i>Vaccinium angustifolium</i>	Lowbush Blueberry	2 Gal	Cont.	Full, nicely shaped

Groundcover, Perennials and Grasses


Qty.	Symbol	Botanical Name	Common Name	Size	Cond	Remarks
190	ab	<i>Ammophila breviflulata</i>	American Beach Grass	1 Gal	Cont.	Full, well rooted, spaced 24" o.c.
455	dp	<i>Dennstedia punctilobata</i>	Hay Scented Fern	1 Qt	Cont.	Full, well rooted, spaced 16" o.c.
115	ed	<i>Eupatorium dubium 'Little Joe'</i>	Joe Pye Weed	1 Gal	Cont.	Full, well rooted, spaced 18" o.c.
7	oc	<i>Osmunda cinnamomea</i>	Cinnamon Fern	1 Gal	Cont.	Full, well rooted
40	pv	<i>Peritum virgatum</i>	Switchgrass	2 Gal	Cont.	Full, well rooted
45	rh	<i>Rudbeckia hirta</i>	Black Eyed Susan	1 Gal	Cont.	Full, well rooted, spaced 16" o.c.
505	ss	<i>Schizachyrium scoparium</i>	Little Bluestem	1 Gal	Cont.	Full, well rooted, spaced 24" o.c.
410	tn	<i>Thelypteris novboracensis</i>	New York Fern	1 Qt	Cont.	Full, well rooted, spaced 16" o.c.

Planting Notes

- Be aware of all underground utilities prior to any planting operations. Contact "CALL BEFORE YOU DIG" prior to excavation.
- All plantings are to be installed by a qualified landscape contractor.
- The contractor shall be required to carry workmen's compensation insurance and comprehensive general liability insurance. Certificates will be required prior to signing contracts.
- Notify owner or landscape architect 72 hours minimum in advance of starting planting operations. Receive approval for layout of all bed lines and material locations prior to installation.
- The landscape architect reserves the right to reject inferior plant materials and substitutions. The landscape architect is willing to make two trips to suppliers to review and approve materials. Previously unapproved materials may be rejected at the site. Minimally, all materials will conform to the "American Standard for Nursery Stock" (ANSI Z60.1 - 2004) of the American Association of Nurserymen.
- All plant material shall have a nursery tag depicting plant species and variety.
- When there is a discrepancy between plant quantities shown on the plan list & the plan, use the quantities from the plant list.
- Test soil for pH and nutrients, adjust as required and receive approval prior to planting.
- Pit to be 2 times wider than root ball or widest spread of container or bare roots.
- Set crown of root ball 2" above finished grade.
- Do not add fertilizer to planting soil for fall plantings.
- All plant material shall be guaranteed by the contractor to be in good, healthy and flourishing condition for a period of one year from the date of acceptance. The contractor shall replace, as soon as weather and seasonal conditions permit, all dead plants and all plants not in a vigorous, thriving condition, as determined by the landscape architect during, and at the end of the guarantee period. Warranty replacement will be provided at no cost to the owner and include materials and labor. Contractor is responsible for repair of any damage incurred during replacement of warranty materials. Warranty period to begin at the final approval of plantings by Landscape Architect and client. Contractor is responsible for maintaining the plant material until final approval is given. This will include watering the plants.
- All existing and proposed vegetation shown on the site plan drawings shall be maintained in a healthy and vigorous growing condition throughout the duration of the project. All vegetation not so maintained shall be replaced with new comparable material at the beginning of the next growing season.
- All plant material shall be installed in accordance with the details on the contract drawings.
- Contractor shall layout all plant materials in locations per plan and receive approval by Landscape Architect prior to installation.
- All planting beds shall receive 3" minimum of shredded cedar or pine bark mulch. All planting beds shown shall be mulched as a continuous bed.
- Contractor shall make fine grade adjustments as necessary, and sod to create finished lawn or as otherwise directed by landscape architect.
- Final grade in all cases shall slope away from building a minimum of 1/4" per foot.
- Irrigation System shall be provided as a Design/Build contract, by Owner.

NOTES

- Survey information taken from zoning map of property prepared by Dennis A. Dellus Land Surveyor dated March 16, 2020.
- For tree removal information see Demolition Plan, sheet C-0 prepared by Landtech dated March 25, 2020.
- For erosion control and drainage details/information see engineering plans by Landtech.

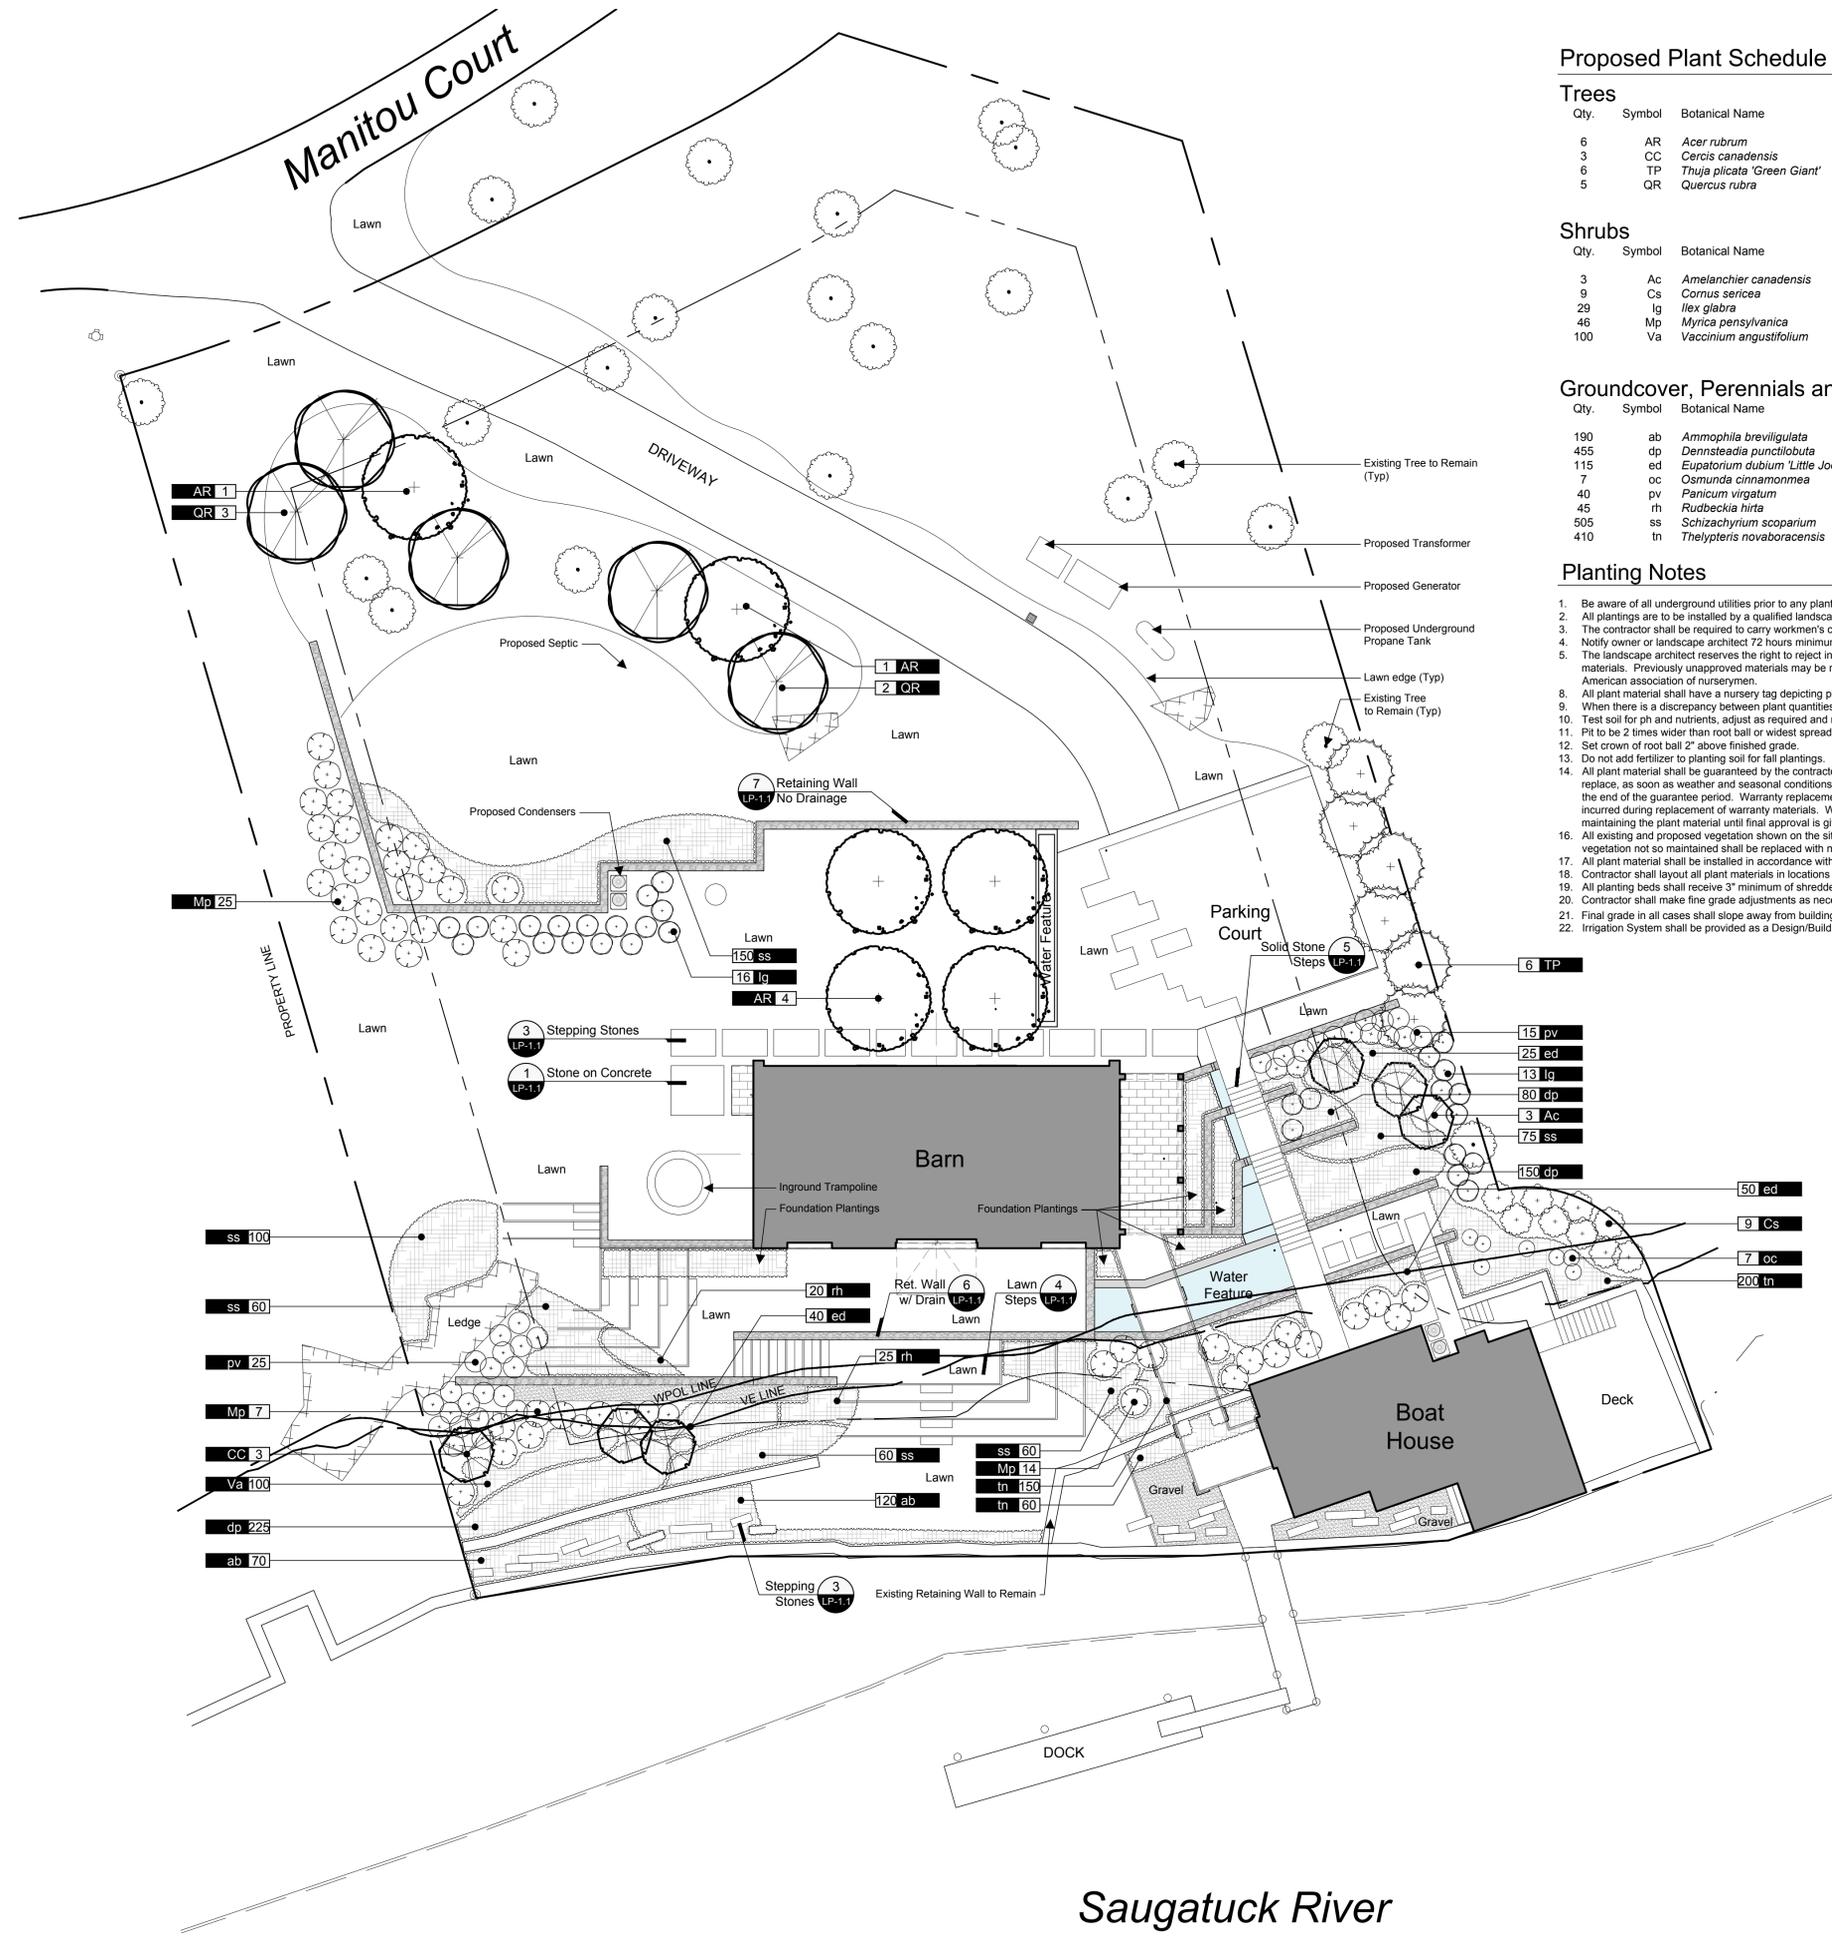

Saugatuck River

2	Town Submittal Planting	07-22-2020
1	Conservation Submission	05-14-2020



**WESLEY STOUT ASSOCIATES**  
 90 Main Street, New Canaan, CT 06840  
 203.960.3100 FAX 203.960.3131  
 www.wesleystout.com


Landscape Plan

Date: 05-14-2020  
 Scale: 1/16" = 1'-0"  
 Sheet:

**LP-1.0**

NOTES


- All walls and stairs final design to be determined by structural engineer.

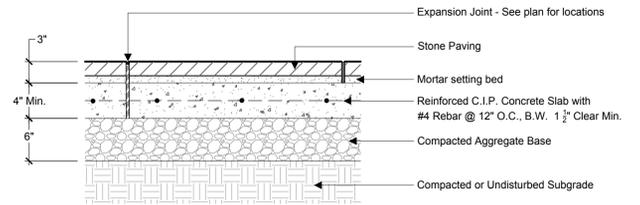

1 Stone on Concrete

LP-1.1


Not to Scale

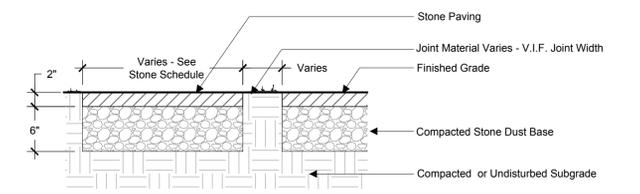

2 Stepping Stones

LP-1.1


Not to Scale

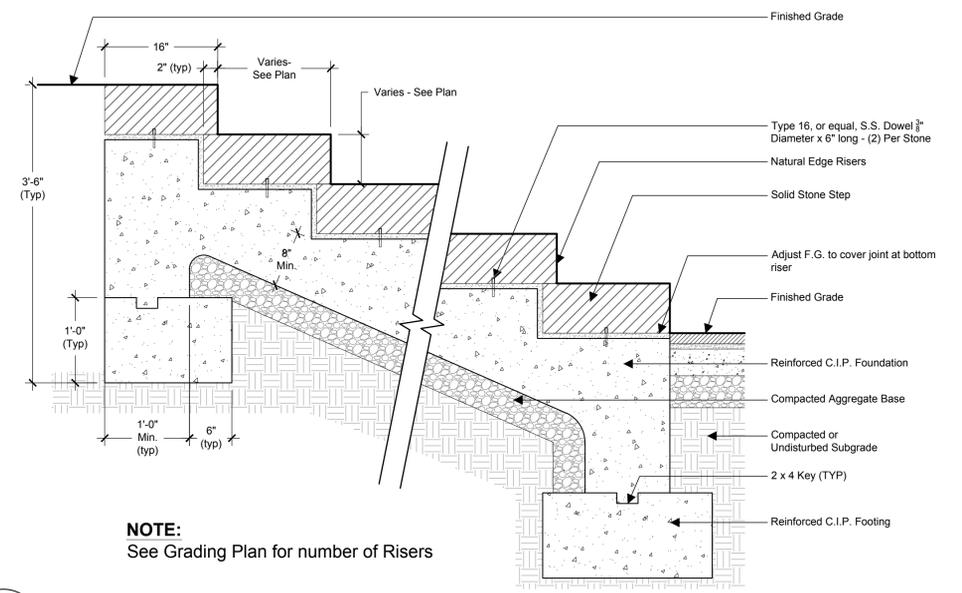

4 Solid Stone Steps

L-1.1


Not to Scale

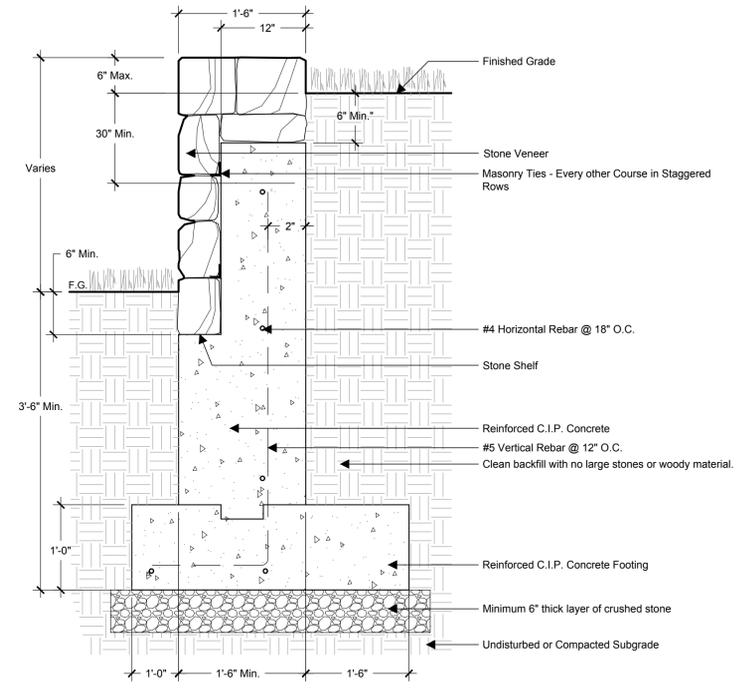


6 Stone Retaining Wall No Drainage

LP-1.1

Not to Scale

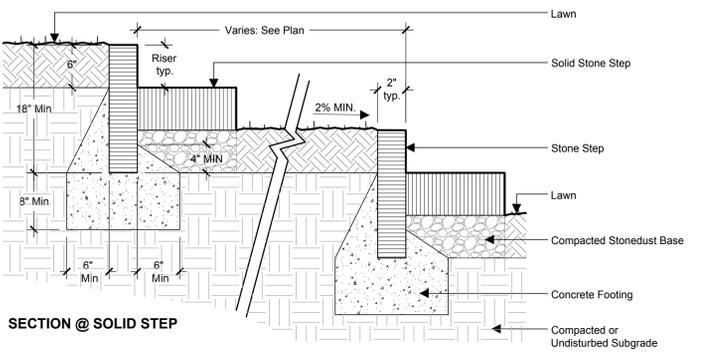

SECTION @ SOLID STEP

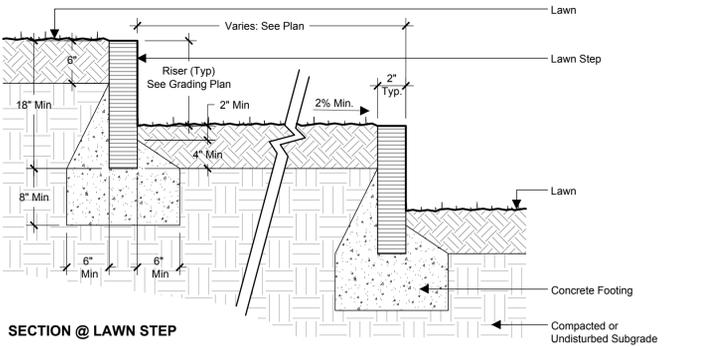


SECTION @ LAWN STEP

3 Lawn Steps

LP-1.1

Not to Scale

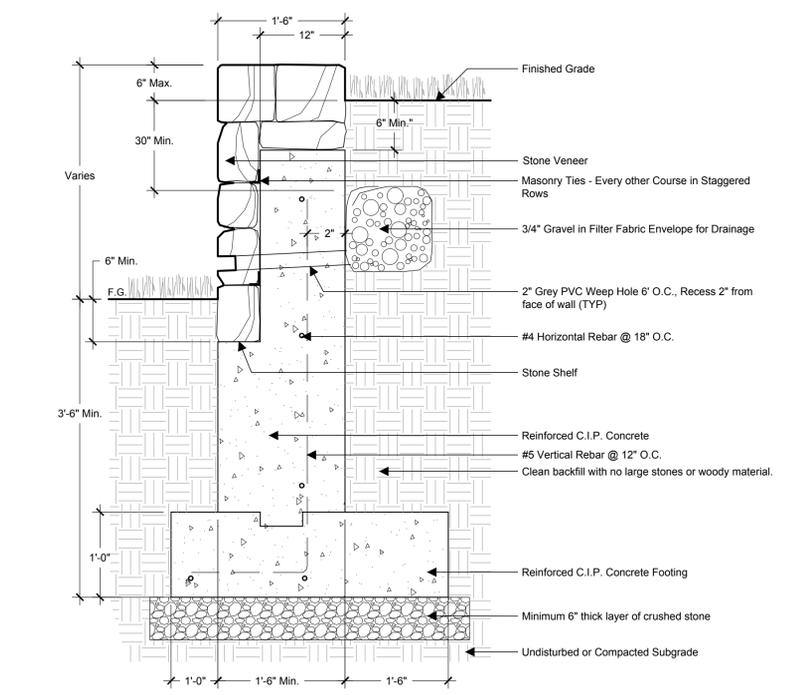

5 Stone Retaining Wall with Drainage

LP-1.1

Not to Scale

2	Town Submittal Planting	07-22-2020
1	Conservation Submission	05-14-2020


**WESLEY STOUT ASSOCIATES**  
90 Main Street, New Canaan, CT 06840  
203.966.3100 FAX 203.966.3111  
www.wesleystout.com

Landscape Details

Date: 05-14-2020  
Scale: As Shown  
Sheet:




LP-1.1

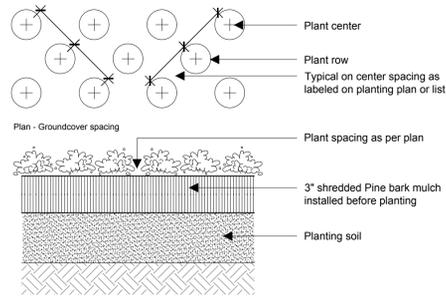


**1** Groundcover Planting  
LP-1.2

Not to Scale

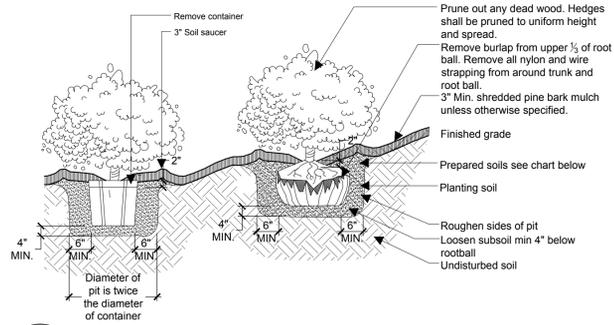


**2** Planting Pit for Shrubs  
LP-1.2

Not to Scale

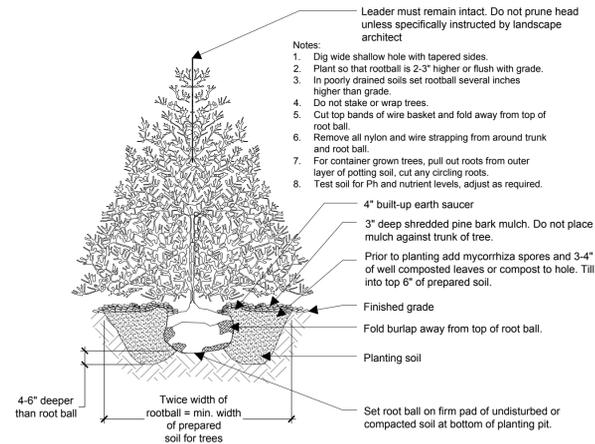


**3** Evergreen Tree Planting  
LP-1.2

Not to Scale

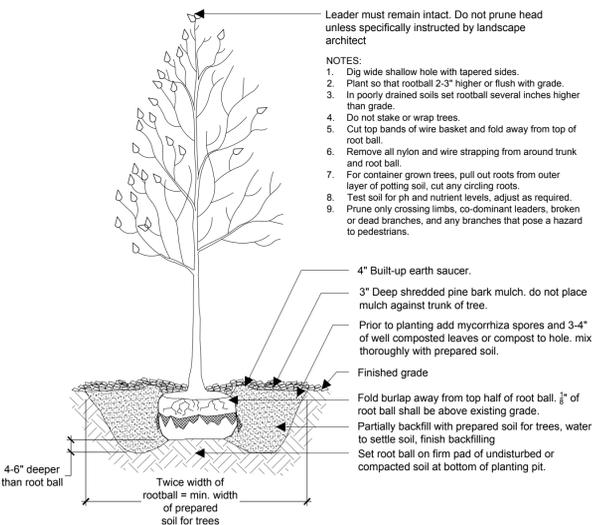


**4** Deciduous Tree Planting  
LP-1.2

Not to Scale

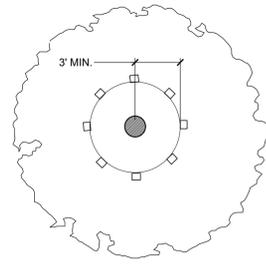

Plan

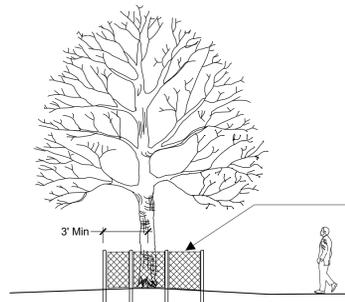

Section

Note: Symbol on site plan is symbolic only and should not be used for actual field location of fence, actual location to be determined in field.

4' Ht. Snow fence with posts at 8' O.C. at 3' outside tree trunk. Unless otherwise directed in field.

**5** Tree Protection  
LP-1.2

Not to Scale

2	Town Submittal Planting	07-22-2020
1	Conservation Submission	05-14-2020



Landscape Details

Date: 05-14-2020

Scale: As Shown

Sheet:



LP-1.2